

## PRODUCT DATA SHEET

# Sikaflex® WS-222 T

(formerly WS-222T)

Polyurethane adhesive for direct glazing

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

<b>Chemical base</b>	1-component polyurethane	
<b>Color (CQP001-1)</b>	Black	
<b>Cure mechanism</b>	Moisture-curing	
<b>Density (uncured)</b>	1.27 kg/l	
<b>Solid content (JASO M338-89)</b>	99 %	
<b>Viscosity (JASO M338-89)</b>	65 Pa·s	
<b>Non-sag properties (JASO M338-89)</b>	Good	
<b>Application temperature</b>	adhesive	20 - 35 °C
	ambient	5 - 35 °C
<b>Tack-free time (JASO M338-89)</b>	45 minutes <sup>A</sup>	
<b>Early tensile lap-shear strength (JASO M338-89)</b>	24 hours	2.5 MPa <sup>A</sup>
<b>Shore A hardness (JASO M338-89)</b>	48	
<b>Tensile strength (JASO M338-89)</b>	6.0 MPa	
<b>Elongation at break (JASO M338-89)</b>	450 %	
<b>Shelf life</b>	6 months <sup>B</sup>	

CQP = Corporate Quality Procedure

<sup>A</sup>) 20 °C / 65 % r. h.<sup>B</sup>) stored below 40 °C in unopened container**DESCRIPTION**

Sikaflex® WS-222 T is an elastic 1-component polyurethane adhesive system for glazing applications. Suited for bonding materials relevant for direct glazing such as paints, glass, ceramic frits and e-coated systems in commercial vehicle production.

**PRODUCT BENEFITS**

- 1-component application
- Cold applied
- Excellent application properties

**AREAS OF APPLICATION**

Sikaflex® WS-222 T is suitable for automated and manual direct glazing as well as elastic bonding in the automotive industry. Sikaflex® WS-222 T bonds well to numerous substrates. Common substrates are pre-treated ceramic frits and glasses with corresponding UV protection as well as cleaned e-coated and painted surfaces.

This product is suitable for experienced professional users only. Tests with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex® WS-222 T

Version 01.01 (03 - 2026), en\_TH

012001262228001040

## CURE MECHANISM

Sikaflex® WS-222 T cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower.

## CHEMICAL RESISTANCE

Sikaflex® WS-222 T is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond.

All pre-treatment steps must be confirmed by preliminary tests on original substrates considering specific conditions in the assembly process.

### Application

Sikaflex® WS-222 T can be processed between 5 °C and 35 °C (ambient) but changes in reactivity and application properties have to be considered.

Consider that the viscosity will increase at low temperature. For easy application, condition the adhesive at ambient temperature prior to use.

To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

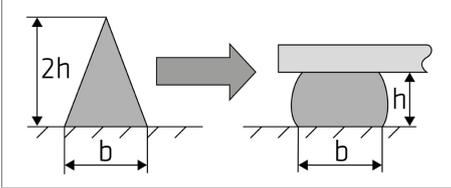


Figure 1: Recommended bead configuration

Sikaflex® WS-222 T can be processed with manual, pneumatic or electric driven piston guns as well as pump equipment.

The open time is significantly shorter in hot and humid climate. The glass must always be installed within the open time. Never join bonding parts if the adhesive has built a skin.

For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

For transparent substrates, bond faces must be fully UV protected by suitable design or means.

### Removal

Uncured Sikaflex® WS-222 T may be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

### FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets

### PACKAGING INFORMATION

Cartridge	330 ml
Pail	20 kg
Drum	260 kg

### BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

### HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

### DISCLAIMER

The information, and, in particular, the recommendations relating to the application and enduse of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### PRODUCT DATA SHEET

Sikaflex® WS-222 T  
Version 01.01 (03 - 2026), en\_TH  
012001262228001040

Sika (Thailand) Limited  
700/37 Moo 5 Amata City Chonburi  
Industrial Estate, T. Klong Tamhru  
A. Muang, Chonburi 20000, Thailand  
Tel : +66 3810 9500  
E-mail : sikathai@th.sika.com  
Website: tha.sika.com

